


25000 BESANCON tel: +33 3 81 50 56 77 fax: +33 3 81 53 29 76




Suspentes à tirants



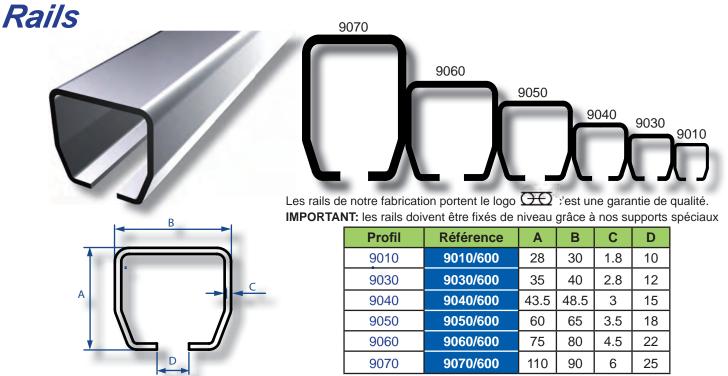


Rails acier galvanisé lg std = 6 m

Charge unitaire entre 2 points : flèche maxi = 1/300eme

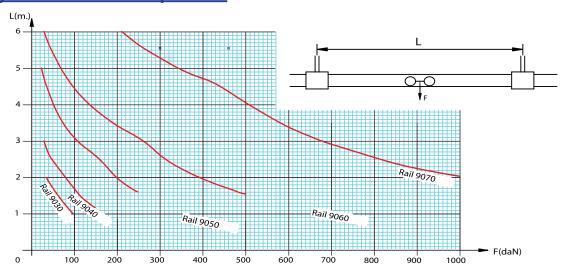

Charge uniformément répartie : flèche maxi = 1/300eme

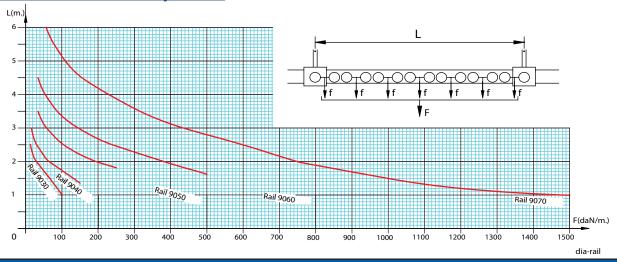










Composants

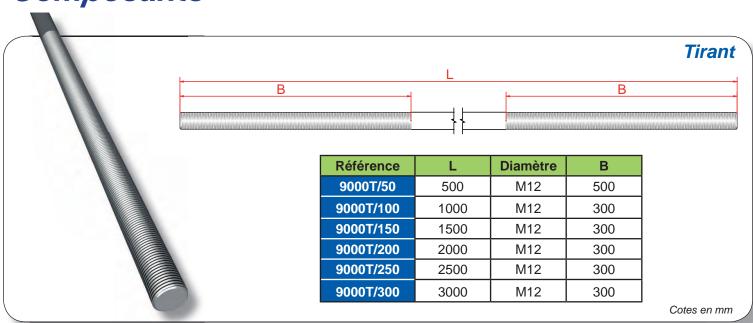








Support à écrou


Profil	Référence	Α	В	С	D	Ε	M	
9030	9031TE	48	43	54	66.5	28	M12	
9040	9041TE	58	53	63	66.5	28	M12	
9050	9051TE	77	79	75	58.5	28	M12	
9060	9061TE	96	96	110	58.5	28	M12	

Cotes en mm

Cotes en mm










Support articulé

Profil	Référence	Α	В	С	Е	F	- 1	J
9030	9031TEA	48	43	29	111	54	27.5	12.5
9040	9041TEA	58	53	29	120	63	27.5	12.5
9050	9051TEA	77	79	29	140	75	27.5	12.5
9060	9061TEA	96	96	29	155	110	27.5	12.5




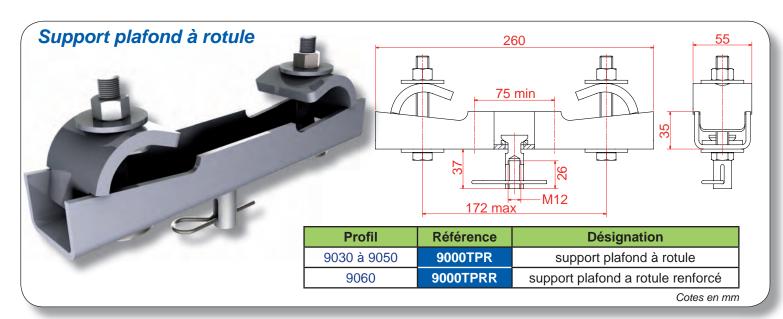


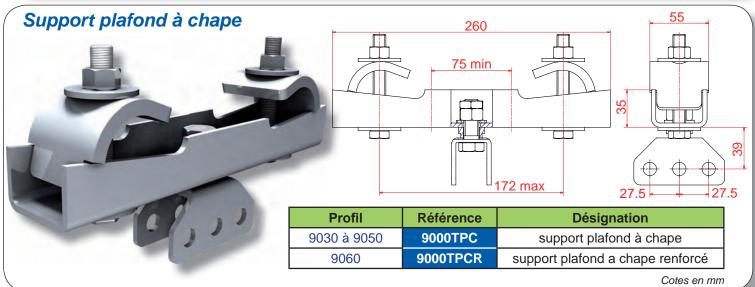


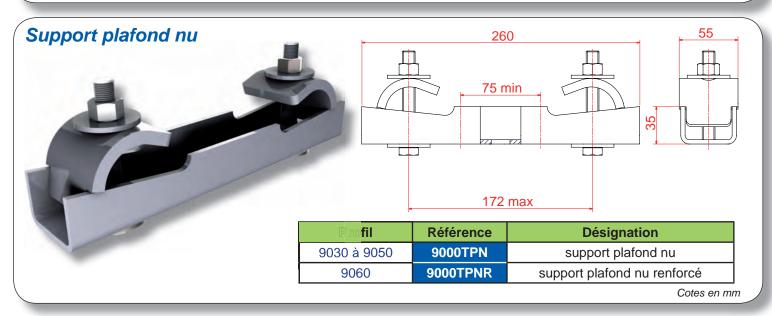




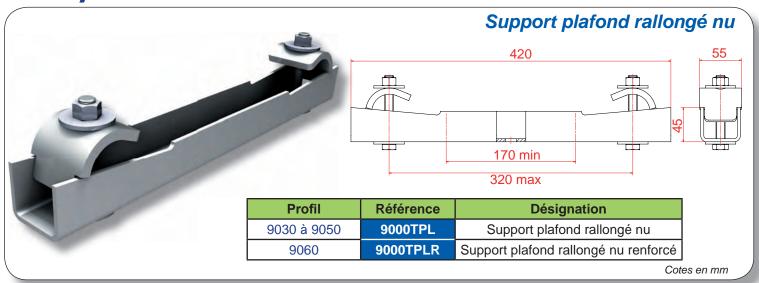


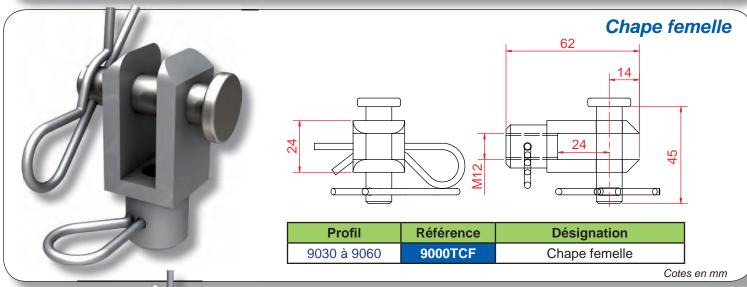


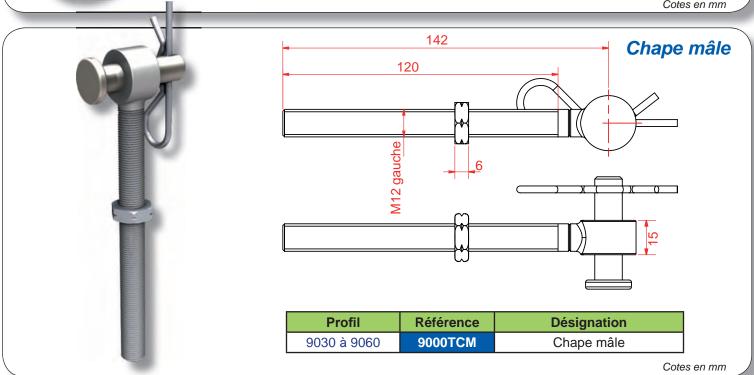



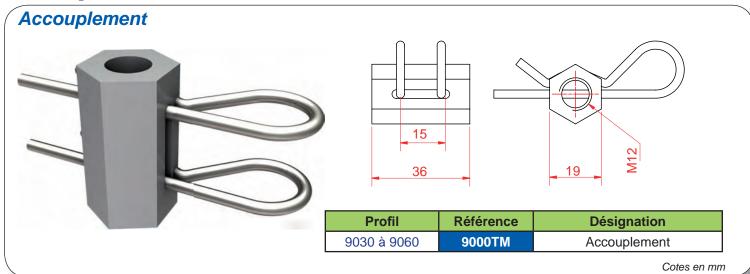


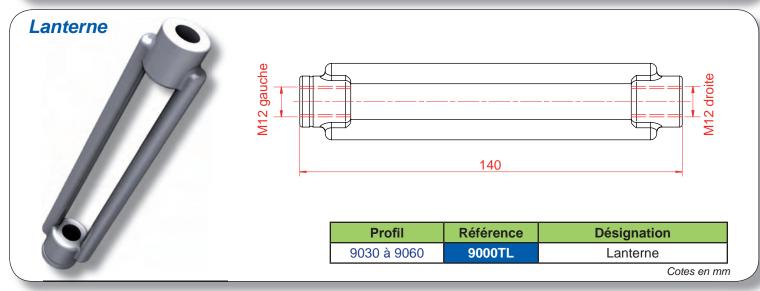

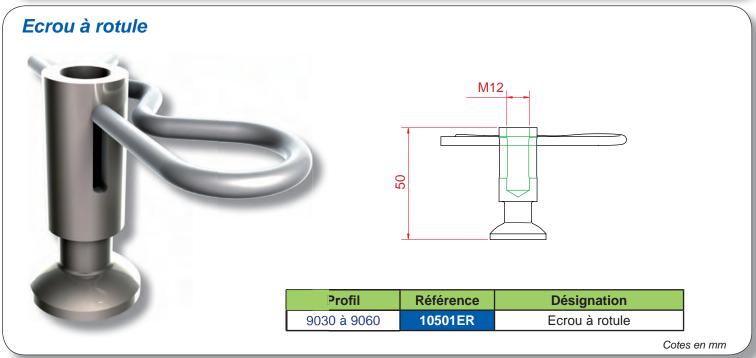



Composants

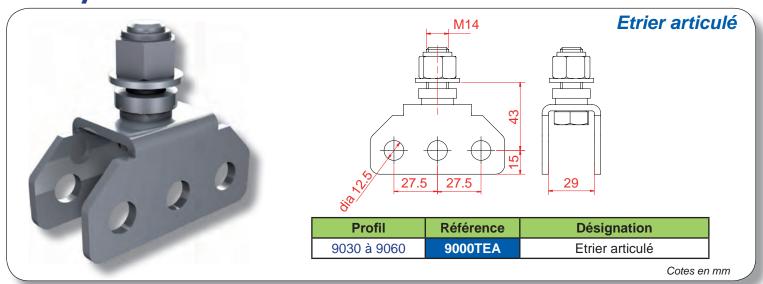

Exemple

